

CTK系列

Introduction of product

- The body of the cylinder is made from aluminium alloy, after the vaporization of aluminum processing, it is more wear resistance and corrosion resistance.
- With the no oil bearing and wear-resisting sealing ring, the cylinder have long service life.
- Multiple piping position to choose
- The cylinder with the buffer action can effectively slow speed and weaken the impact force on the cylinder head.
- The cylinder with the magnetic ring can match with magnetic reed switch.



產品簡介

- 氣缸缸體使用鋁合金材料，經氣化鋁處理，更具耐磨及耐腐蝕性。
- 採用無給油軸承及耐磨密封環使用壽命長。
- 多個配管位置可供選擇。
- 附緩衝型可有效減緩對缸蓋之衝擊。
- 附磁性環型可搭配選用磁簧開關。

Specifications 特性資料




型號	CTK		
作動方式	復動型		
氣缸內徑	40	50	63
使用流體	空氣		
使用壓力範圍	0.5~9.9 kgf/cm ²		
耐壓力	15 kgf/cm ²		
周圍溫度	-5°C~+60°C(不凍結)		
給油	不需給油		
使用速度範圍	50~500 mm/sec		
緩衝裝置	端點可調緩衝		

Ordering Code 訂購標示法

CTK - 40 - 100(M) Y

型號	氣缸內徑	行程	無:無
	40,50,63	50 75 100 125 150	Y:Y接頭 I:I接頭 M:附磁石


使用範例

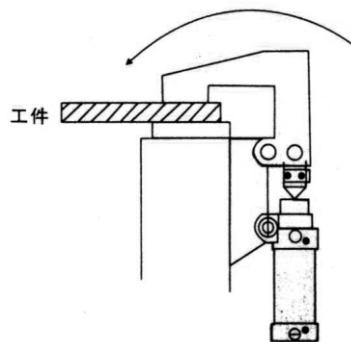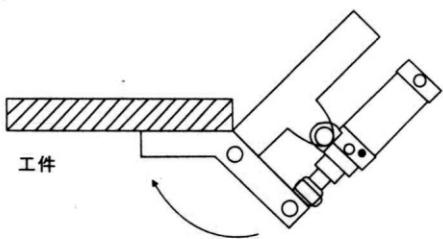



CTK系列

Dimensional features 外形尺寸圖

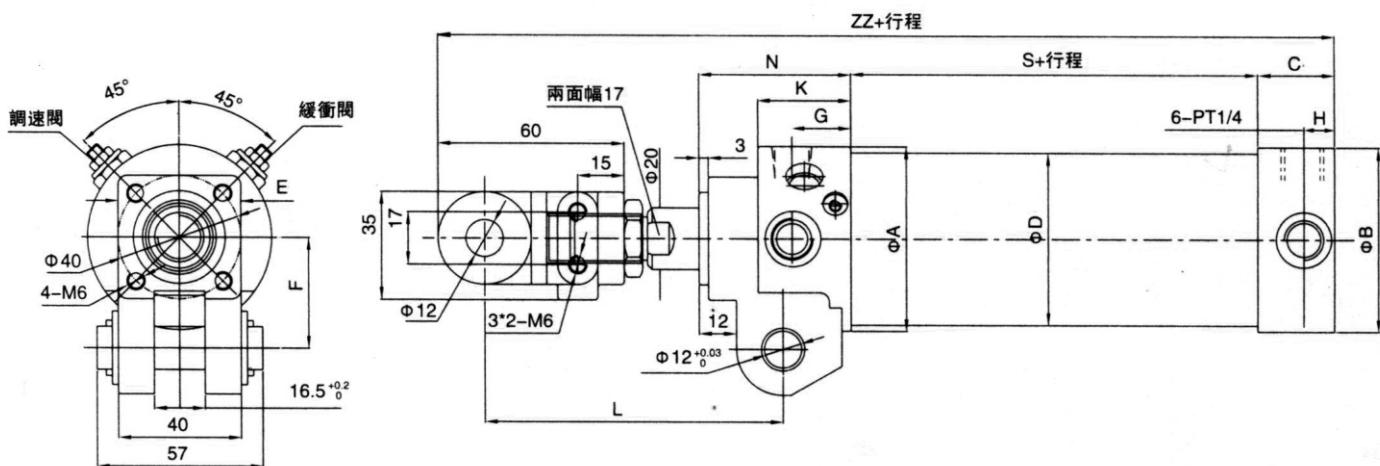


Dimensional table 外形尺寸表


缸徑 型號	ØA	ØB	ØD	C	E	F	G	H	K	N	L	S	ZZ
40	48	47	47	25	36	36	19	10	29	48	97	46	205
50	60	58	58	25	40	36	19	10	29	48	97	46	205
63	74	72	69	25	50	36	19	10	29	48	97	46	205

接頭配件


I接頭

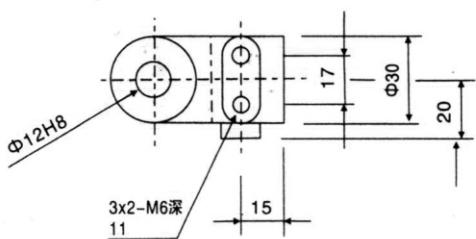

Y接頭

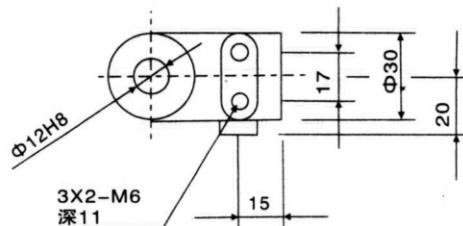

插銷



開口銷: Φ 1/8" × 3/4" L

